




EXP SERIES

EXTEND THE PARTNERSHIP

EXP-SERIES



EXP-630 / 631


EXTEND GREAT INTERNATIONAL CORP.

20F., NO. 309, Sec. 2, TAIWAN BLVD.,
TAICHUNG, TAIWAN, R.O.C.

T 886-4-2326-5568
F 886-4-2326-2268

www.extendgroup.com.tw
extend@extendgroup.com.tw

EXP-630

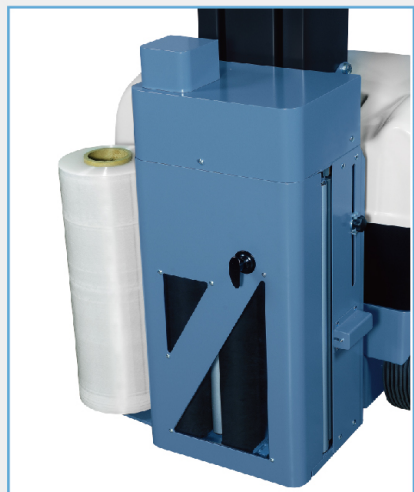

▲ CARRIAGE

FEATURES

- 230% & 300% POWER PRE-STRETCH (1M -> 4M)
- AVAILABLE 200% & 250% POWER PRE-STRETCH
- EASY FILM TREADING DESIGN
- AUTOMATIC FILM CUTTING
- ADJUSTABLE TOP AND BOTTOM WRAP COUNTS
- ADJUSTABLE WRAPPING TENSION/CART ROTATION SPEED/CARRIAGE SPEED
- PASSWORD PROTECTED CONTROL PANEL
- HEIGHT DETECTION BY PHOTO SENSOR
- ONE-WAY IDLE ROLLER DESIGN TO ALLOW FILM TAIL TO STAY OUTSIDE OF CARRIAGE WHEN FILM BREAKS
- CARRIAGE ANTI-FALLING DEVICE



▲ CONTROL PANEL



▲ TOUCH SCREEN CONTROL PANEL (EXP-630-PLUS)

EXP-631



▲ CARRIAGE

FEATURES

- BRAKE STRETCH 65%
- QUICK RELEASE FOR EASY FILM APPLY ONTO PALLET
- ADJUSTABLE TOP AND BOTTOM WRAP COUNTS
- ADJUSTABLE CART ROTATION SPEED/CARRIAGE SPEED
- PASSWORD PROTECTED CONTROL PANEL
- HEIGHT DETECTION BY PHOTO SENSOR
- CARRIAGE ANTI-FALLING DEVICE

SPECIFICATION

- Batteries: TWO 12V 100Ah Non-maintenance type batteries
- Battery Charger: 110V ~ 240V
- Power Consumption: 0.7kW
- Cart Rotating Speed: 20 - 90M/min
- Carriage Speed: 1-5M/min
- Max. Loading Weight: Floor Capacity
- Min. Pallet Size: 600mm (L) x 600mm (W)
- Max. Wrapping Height: 2200mm
- Numbers of Pallets per battery charge: Up to 300 pallets

Option

- Wrapping Height: 2400mm/2800mm
- Touch Screen Control Panel
- Photocell Sensor for Black Film or Colored product
- Remote Control



PATENT PENDING



▲ NEW TOP COVER



▲ EASY THREAD (EXP-630)



▲ AUTOMATIC FILM CUTTING (EXP-630)

